


# GEOLOGI FOR SAMFUNNET

*GEOLOGY FOR SOCIETY*



|  |  |  |   |
|--|--|--|---|
| Report no.: 2012.022   |  | ISSN 0800-3416   | Grading: Open   |
| <b>Title:</b><br>Helicopter-borne magnetic, electromagnetic and radiometric geophysical survey in Rombaken area, Narvik, Nordland  |  |  |   |
| <b>Authors:</b><br>Alexei Rodionov, Frode Ofstad and Janusz Koziel   |  | <b>Client:</b><br>NGU  |   |
| <b>County:</b><br>Nordland   |  | <b>Commune:</b><br>Narvik  |   |
| <b>Map-sheet name (M=1:250.000)</b><br>Narvik  |  | <b>Map-sheet no. and -name (M=1:50.000)</b><br>1431-I, -II, -III & -IV         |   |
| <b>Deposit name and grid-reference:</b><br>Rombaken UTM 33N 611000 - 7595000   |  | <b>Number of pages:</b> 25 <b>Price (NOK):</b> 120,-<br><b>Map enclosures:</b> |   |
| <b>Fieldwork carried out:</b><br>August-September 2011   | <b>Date of report:</b><br>July 10th 2012 | <b>Project no.:</b><br>342900  | <b>Person responsible:</b><br> |
| <b>Summary:</b><br><p>NGU conducted an airborne geophysical survey in Rombaken area in August - September 2011 as a part of MINN project. This report describes and documents the acquisition, processing and visualization of recorded datasets. The geophysical survey results reported herein are 5218 line km.</p> <p>The modified Geotech Ltd. Hummingbird frequency domain system supplemented by optically pumped cesium magnetometer and 1024 channels RSX-5 spectrometer was used for data acquisition. The survey was flown with 200 m line spacing, line direction of 90° East West and average speed 98 km/h. The average terrain clearance of the bird was 64 m.</p> <p>Collected data were processed in NGU using Geosoft Oasis Montaj software. Raw total magnetic field data were corrected for diurnal variation and levelled using standard micro levelling algorithm. EM data were filtered and levelled using both automated and manual levelling procedure. Apparent resistivity was calculated from in-phase and quadrature data for each of the five frequencies separately using a homogeneous half space model. Apparent resistivity dataset was filtered and levelled. Radiometric data were processed using standard procedures recommended by International Atomic Energy Association.</p> <p>All data were gridded with the cell size of 50 m and presented as a shaded relief maps at the scale of 1:50 000.</p> |  |  |   |
| <b>Keywords:</b> Geophysics  |  | Airborne   | Magnetic  |
| Electromagnetic  |  | Gamma spectrometry   | Radiometric   |
|  |  |  | Technical report  |

## Table of Contents

|  |           |
|--|-----------|
| <b>1. INTRODUCTION</b> .....   | <b>5</b>  |
| <b>2. LOCATION AND ACCESS</b> .....                                  | <b>5</b>  |
| <b>3. SURVEY SPECIFICATIONS</b> .....                                | <b>6</b>  |
| <b>3.1 Airborne Survey Parameters</b> .....                          | <b>6</b>  |
| <b>3.2 Airborne Survey Instrumentation</b> .....                     | <b>6</b>  |
| <b>3.2.1 Electromagnetic System</b> .....                            | <b>6</b>  |
| <b>3.2.2 Airborne Magnetometer</b> .....                             | <b>7</b>  |
| <b>3.2.3 Gamma Spectrometer</b> .....                                | <b>7</b>  |
| <b>3.2.4 Magnetic Base Station</b> .....                             | <b>7</b>  |
| <b>3.2.5 Radio Altimeter</b> .....                                   | <b>7</b>  |
| <b>3.2.6 Barometric Altimeter</b> .....                              | <b>7</b>  |
| <b>3.2.7 Navigation System</b> .....                                 | <b>7</b>  |
| <b>3.2.8 Digital Acquisition software</b> .....                      | <b>8</b>  |
| <b>3.3 Airborne Survey Instrumentation Summary</b> .....             | <b>8</b>  |
| <b>3.4 Airborne Survey Logistics Summary</b> .....                   | <b>8</b>  |
| <b>4. DATA PROCESSING AND PRESENTATION</b> .....                     | <b>9</b>  |
| <b>4.1 Total Field Magnetic Data</b> .....                           | <b>9</b>  |
| <b>4.1.1 Diurnal Corrections</b> .....                               | <b>9</b>  |
| <b>4.1.2 Corrections for Lag and heading</b> .....                   | <b>9</b>  |
| <b>4.1.3 Magnetic data gridding and presentation</b> .....           | <b>9</b>  |
| <b>4.2 Electromagnetic Data</b> .....                                | <b>10</b> |
| <b>4.2.1 Instrumental noise</b> .....                                | <b>10</b> |
| <b>4.2.2 Instrument Drift</b> .....                                  | <b>10</b> |
| <b>4.2.3 Apparent resistivity calculation and presentation</b> ..... | <b>11</b> |
| <b>4.3 Radiometric data</b> .....                                    | <b>11</b> |
| <b>5. PRODUCTS</b> .....   | <b>11</b> |
| <b>6. REFERENCES</b> .....   | <b>12</b> |
| <b>7. Appendix A1: Flow chart of magnetic processing</b> .....       | <b>13</b> |
| <b>8. Appendix A2: Flow chart of EM processing</b> .....             | <b>13</b> |
| <b>9. Appendix A3: Flow chart of radiometry processing</b> .....     | <b>13</b> |

## FIGURES

|   |    |
|---|----|
| Figure 1. Rombaken survey. Location map.....                            | 5  |
| Figure 2. Magnetic susceptibility cross-section A – A.....              | 10 |
| Figure 3. Rombaken survey. Flight path.....                             | 15 |
| Figure 4. Total magnetic field .....                                    | 16 |
| Figure 5. Magnetic Analytic Signal .....                                | 17 |
| Figure 6. Apparent resistivity. Frequency 34000 Hz, Coplanar coils..... | 18 |
| Figure 7. Apparent resistivity. Frequency 880 Hz, Coplanar coils.....   | 19 |
| Figure 8. Apparent resistivity. Frequency 7000 Hz, Coaxial coils.....   | 20 |
| Figure 9. Apparent resistivity. Frequency 980 Hz, Coaxial coils.....    | 21 |
| Figure 10. Uranium ground concentration .....                           | 22 |
| Figure 11. Thorium ground concentration .....                           | 23 |
| Figure 12. Potassium ground concentration .....                         | 24 |
| Figure 13. Total Count.....   | 25 |

## TABLES

|   |    |
|---|----|
| Table 1. Hummingbird electromagnetic coil configurations.....       | 7  |
| Table 2 . Maps in scale 1:50000 available from NGU on request. .... | 11 |

## 1. INTRODUCTION

Recognising the impact that investment in mineral exploration and mining can have on the socio-economic situation of a region, the government of Norway recently initiated MINN programme (Mineral resources in North Norway). The goal of this program is to enhance the geological information that is relevant to an assessment of the mineral potential of the three northernmost counties. The airborne geophysical surveys - helicopter borne and fixed wing- are important integral part of MINN program. The airborne survey results reported herein amount to 5218 line-km flown over the Rombaken survey area.

The objective of the airborne geophysical survey was to obtain a dense high-resolution aeromagnetic, electromagnetic and radiometric data over the survey area. This data is required for the enhancement of a general understanding of the regional geology of the area. In this regard, the data can also be used to map contacts and structural features within the property. It also allows to better define the potential of known zones of mineralization, their geological settings and identify new areas of interest.

The survey incorporated the use of a Hummingbird™ five-frequency electromagnetic system supplemented by a high-sensitivity cesium magnetometer, spectrometer and radar altimeter. A GPS navigation computer system with flight path indicators ensured accurate positioning of the geophysical data with respect to the World Geodetic System 1984 geodetic datum (WGS-84).

## 2. LOCATION AND ACCESS

Rombaken survey area is situated in the Narvik commune, Nordland and centred at approximately UTM 33 W 611000 - 7595000. The area is located in close proximity of the city of [Narvik](#). Access to the area is possible by car on E6 road or by air. A small airport Framnes, located just outside of the city centre, is suitable for landing of commercial aircrafts and helicopters. The flight path of the survey and related land can be seen in figure 3.



Figure 1. Rombaken survey. Location map

### 3. SURVEY SPECIFICATIONS

#### 3.1 Airborne Survey Parameters

NGU used a Hummingbird™ electromagnetic and magnetic helicopter survey system designed to obtain low level, slow speed, detailed airborne magnetic and electromagnetic data (Geotech 1997).

The airborne survey began on August 7 and ended on September 11, 2011. A Eurocopter AS350-B2 helicopter was used to tow the bird. The survey lines were spaced 200 m apart and oriented at a 90° azimuth to W-E. The magnetic and electromagnetic sensors are housed in a single 7.5 m long bird, which was maintained at an average of 64 m above the topographic surface. Gamma spectrometer installed under the belly of the helicopter registered natural gamma ray radiation simultaneously with the acquisition of magnetic/EM data.

Extremely rugged terrain and abrupt changes in topography affect the aircraft pilot's ability to 'drape'; therefore there are positive and negative variations in sensor height with respect to the estimated range, which is higher than the standard height of 30 m.

Some electronic components of the bird were replaced before the start of the survey. Unfortunately, the EM subsystem was not recalibrated and phasing and gain for frequency 6600 Hz were incorrect from the beginning of the survey. The error was discovered and system was recalibrated on August 18, however, the significant part of the survey was already complete at that time. In these circumstances it was decided to exclude 6600 Hz data from processing.

The ground speed of the aircraft varied from 30 – 110 km/h depending on topography, wind direction and its magnitude. On average the ground speed is estimated to be 98 km/h. Magnetic data were recorded at 0.2 second intervals resulting in 6 to 8 m point spacing. EM data were recorded at 0.1 second intervals resulting in data with a sample increment of 3 to 4 m along the ground. Spectrometry data were recorded every 1 second. The above parameters were designed to allow for sufficient detail in the data to detect subtle anomalies that may represent mineralization and/or rocks of different lithological and petrophysical composition.

Navigation system uses GPS/GLONASS satellite tracking systems to provide real-time WGS-84 coordinate locations for every second. The accuracy achieved with no differential corrections is reported to be ± 5 m in the horizontal directions.

#### 3.2 Airborne Survey Instrumentation

##### 3.2.1 Electromagnetic System

*Model:* Hummingbird™ manufactured by Geotech Ltd.  
*Type:* Towed bird with 2 maximally coupled coil configurations for 5 distinct frequencies: 2 vertical coaxial, and 3 horizontal coplanar (Table 1).  
*Sample Rate:* 10 samples per second (10 Hz)  
*Noise level:* 1 – 2 ppm

**Table 1.** Hummingbird electromagnetic coil configurations.

| Coils: | Frequency | Orientation | Separation |
|--------|-----------|-------------|------------|
| A      | 7700 Hz   | Coaxial     | 6.20 m     |
| B      | 6600 Hz   | Coplanar    | 6.20 m     |
| C      | 980 Hz    | Coaxial     | 6.025 m    |
| D      | 880 Hz    | Coplanar    | 6.025 m    |
| E      | 34000 Hz  | Coplanar    | 4.87 m     |

### 3.2.2 Airborne Magnetometer

*Model:* Scintrex CS-2  
*Type:* Optically pumped Cesium vapour magnetometer.  
*Sensitivity:* 0.002 nT  
*Sampling Rate:* 5 Hz  
*Counter* Kroum KMAG-4

### 3.2.3 Gamma Spectrometer

*Model:* Radiation Solutions RSX-5  
*Number of detectors:* 4x4 Litre downward, 1x4 Litre upward.  
*Number of channels:* 1024  
*Sampling interval:* 1 sec  
*Stabilisation* Automatic multi-peak

### 3.2.4 Magnetic Base Station

*Model:* Scintrex EnviMAG  
*Type:* Proton magnetometer.  
*Sensitivity:* 0.1 nT  
*Sampling interval:* 3 sec.

### 3.2.5 Radio Altimeter

*Model:* Bendix/King KRA 405B  
*Type:* Radar altimeter  
*Accuracy:*  $\pm 3\%$  at 0-500ft and  $5\%$  at 500-2500ft  
*Sampling interval:* 1 sec.

### 3.2.6 Barometric Altimeter

*Model:* Honeywell Inc. PPT  
*Type:* Digital Pressure Transducer  
*Accuracy:*  $\pm 0.03\%$  FS  
*Sampling interval:* 1 sec.

### 3.2.7 Navigation System

*Model:* Topcon receiver  
*Display:* Remote color screen display for flight path cross-track guidance.  
*Accuracy:*  $\pm 5$  m  
*Sampling interval:* 1 sec.

### 3.2.8 Digital Acquisition software

*Manufacturer:* 2 separate "In-house" build applications for acquisition of  
1) navigation/magnetic, 2) EM data.  
Radiation Solutions RadAssist software (RSX-5 spectrometer)

*Computer:* Nexcom VTC 6100

*Display:* 17" LDS 4101D

*Interface Cards:* USB Flash drives

### 3.3 Airborne Survey Instrumentation Summary

The aircraft used for the survey was a Eurocopter AS350-B2. The rack mounted digital data acquisition system (DAS), spectrometer console, navigation computer and barometric altimeter was installed onto the floor in the rear passenger compartment of the aircraft. A skin cable, passed through the belly of the aircraft, connected the DAS to the tow cable. The DAS computer screen was mounted on the rack to the left side of the operator's seat. The navigation screen displaying navigation information and an altitude of the helicopter was installed on the instrument panel on the pilot side of the cockpit. The GPS receiver antenna was mounted externally to the tail tip of the helicopter.

The electromagnetic, magnetic and radiometric, altitude and navigation data were monitored on four separate windows in the operator's display during flight while they were recorded in three data ASCII streams to the DAS hard disk drive. Spectrometry data were also recorded to internal hard drive of spectrometer. The ASCII data files were transferred to the field workstation via USB flash drive. Base station magnetometer data were recorded once every 3 second to a laptop computer HDD as an ASCII file. The data were transferred to the field workstation. The CPU clock of the base magnetometer computer was synchronized to the CPU clock of the DAS on a daily basis. The raw data files were backed up onto USB flash drive in the field.

### 3.4 Airborne Survey Logistics Summary

|                                   |  |
|-----------------------------------|--|
| Traverse (survey) line spacing:   | 200 metres   |
| Traverse line direction:          | 90° East - West  |
| Nominal aircraft ground speed:    | 30 - 110 km/h  |
| Average sensor terrain clearance: | 64 metres  |
| Sampling rates:                   | 0.2 seconds - magnetometer<br>0.1 seconds - electromagnetics<br>1.0 second - spectrometer, GPS,<br>altimeter |

## 4. DATA PROCESSING AND PRESENTATION

The data were processed at the Geological Survey of Norway office in Trondheim. The ASCII data files were loaded into three separate Oasis Montaj databases. All three datasets were processed consequently according to processing flow charts shown in Appendix A.

### 4.1 Total Field Magnetic Data

At the first stage the magnetic data were visually inspected and spikes were removed manually. Then the data from magbase station were imported in magnetic database using the standard Oasis magbase.gx module. Diurnal variation channel was also inspected for spikes and spikes were removed manually if necessary. Since the data from both - airborne and magbase magnetometers- were smooth and contained no significant cultural noise filtering of the raw data was not necessary. Typically, several corrections have to be applied to magnetic data before gridding - heading correction, lag correction and diurnal correction.

#### 4.1.1 Diurnal Corrections

The temporal fluctuations in the magnetic field of the earth affect the total magnetic field readings recorded during the airborne survey. This is commonly referred to as the magnetic diurnal variation. These fluctuations can be effectively removed from the airborne magnetic data set by using a stationary reference magnetometer that records the magnetic field of the earth simultaneously with the airborne sensor.

The base magnetometer was located at the airport Frames (Narvik). The average total field value for this point was 52662 nT. The base station computer clock was synchronized with the DAS clock on a daily basis. The recorded data are merged with the airborne data and the diurnal correction is applied according to equation (1).

$$\mathbf{B}_{Tc} = \mathbf{B}_T + (\bar{B}_B - \mathbf{B}_B), \quad (1)$$

Where:

$\mathbf{B}_{Tc}$  = Corrected airborne total field readings

$\mathbf{B}_T$  = Airborne total field readings

$\bar{B}_B$  = Average datum base level

$\mathbf{B}_B$  = Base station readings

#### 4.1.2 Corrections for Lag and heading

Neither a lag nor cloverleaf tests were performed before the survey. According to previous reports the lag between logged magnetic data and the corresponding navigational data was 1-2 fids. Translated to a distance it would be no more than 10 m - the value comparable with the precision of GPS. A heading error for a towed system is usually either very small or non-existent. So no lag and heading corrections were applied.

#### 4.1.3 Magnetic data gridding and presentation

Before gridding, flight data were split by lines. For the purposes of data presentation and interpretation the total field magnetic data are gridded with a cell size of 50 m, which represents one quarter of the 200 m average line spacing. A micro levelling technique was applied to the magnetic data to remove small line-to-line levelling errors and a 5 x 5 convolution filter was passed over the final grid to smooth the grid image.

The analytic signal of the total magnetic field was calculated from the resulting total magnetic field map. The analytical signal transforms the shape of the magnetic anomaly from any magnetic inclination to positive body-centred anomaly and it's widely utilized for mapping of structures.

3D inversion of magnetic data in the central part of the survey area was performed using Mag3Dv3 UBC inversion software (UBC 2000, UBC 2005). One of the magnetic susceptibility cross-section derived from the inversion is presented on maps as an example of the advanced processing of magnetic datasets. Complete results of the 3D inversion are available on a request.

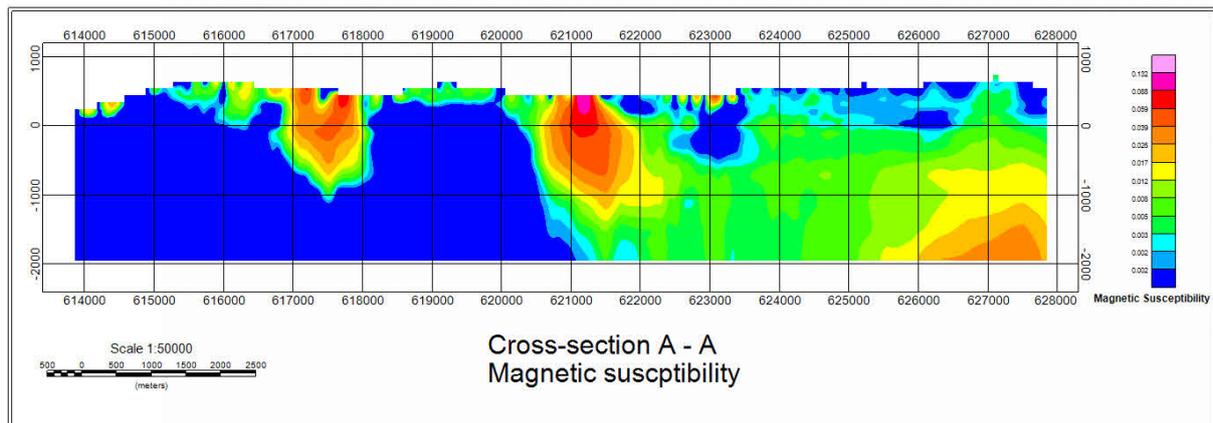


Figure 2. Magnetic susceptibility cross-section A – A.

## 4.2 Electromagnetic Data

The DAS computer records both an in-phase and a quadrature value for each of the five coil sets of the electromagnetic system. Instrumental noise and drift should be removed before computation of an apparent resistivity.

### 4.2.1 Instrumental noise

In-phase and quadrature data were filtered with 3 fiducial non-linear filter to eliminate spherical responses and instrumental noise which was represented as irregular spikes of large amplitude in records. Simultaneously, the 20 fids low-pass filter was also applied to suppress high frequency components of instrumental and cultural noise.

### 4.2.2 Instrument Drift

In order to remove the effects of instrument drift caused by gradual temperature variations in the transmitting and receiving circuits, background responses are recorded during each flight. To obtain a background level the bird is raised to an altitude of approximately 1000 ft above the topographic surface so that no electromagnetic responses from the ground are present in the recorded traces. The EM traces observed at this altitude correspond to a background (zero) level of the system. If these background levels are recorded at 20-30 minute intervals, then the drift of the system (assumed to be linear) can be removed from the data by resetting these points to the initial zero level of the system. The drift must be removed on a flight-by-flight basis, one frequency at a time, before any further processing is carried out. Geosoft HEM module was used for applying drift correction. Residual instrumental drift, often non-linear, was manually removed on line-to-line basis.

### 4.2.3 Apparent resistivity calculation and presentation

When levelling of the EM data was complete, apparent resistivity was calculated from in-phase and quadrature EM components using a half space homogeneous model of the Earth (Geosoft HEM module) for four frequency separately. As it was explained above, data for frequency 6600 was not processed due to partly wrong calibration. Resistivity data were visually inspected and then levelled. Revised resistivity data were gridded with a cell size 50 m and convolution filter was applied to smooth the grids.

### 4.3 Radiometric data

In processing of the airborne gamma ray spectrometry data, live time corrected U, Th and K were corrected for the aircraft and cosmic background (e.g. Grasty 1987; IAEA 2003). The upward detector method, as discussed in IAEA (2003), was applied to remove the effects of radon in the air below and around the helicopter. Window stripping was used to isolate count rates from the individual radio-nuclides K, U and Th (IAEA, 2003). The topography in the region was rough, and the sensor was not always at a constant altitude. Stripped window counts were therefore corrected for variations in flying height to a constant height of 60 m. Finally, count rates were converted to effective ground element concentrations using calibration values derived from calibration pads at the Geological Survey of Norway in Trondheim. A list of the parameters used in the processing scheme is given in Appendix B1. For further reading regarding standard processing of airborne radiometric data, we recommend the publication from Minty et al. (1997).

## 5. PRODUCTS

Processed digital data from the survey are presented as:

1. Three Geosoft XYZ files: RombakenMag.xyz, RombakenEM.xyz, Rombakenspectrometry.xyz, available from NGU on request.
2. Coloured maps at the scale 1:50000 available from NGU on request.

| Map #       | Name   |
|-------------|--|
| 2012.022-01 | Total magnetic field, Rombaken                           |
| 2012.022-02 | Analytic signal, Rombaken                                |
| 2012.022-03 | Apparent resistivity, Frequency 34000 Hz, coplanar coils |
| 2012.022-04 | Apparent resistivity, Frequency 880 Hz, coplanar coils   |
| 2012.022-05 | Apparent resistivity, Frequency 7000 Hz, coaxial coils   |
| 2012.022-06 | Apparent resistivity, Frequency 980 Hz, coaxial coils    |
| 2012.022-07 | Uranium ground concentration                             |
| 2012.022-08 | Thorium ground concentration                             |
| 2012.022-09 | Potassium ground concentration                           |
| 2012.022-10 | Total count  |

**Table 2 . Maps in scale 1:50000 available from NGU on request.**

Downscaled images of the maps are shown on figures 4 -13.

## 6. REFERENCES

1. Geotech 1997: Hummingbird Electromagnetic System. Users manual. Geotech Ltd. October 1997
2. UBC 2000: Manual for running the program "EM1DFM". UBC - Geophysical Inversion Facility, Department of Earth & Ocean Sciences, University of British Columbia, Vancouver, CANADA. July, 2000.
3. UBC 2005: MAG3D. A Program Library for Forward Modelling and Inversion of Magnetic Data over 3D Structures. UBC - Geophysical Inversion Facility, Department of Earth & Ocean Sciences, University of British Columbia, Vancouver, CANADA. May, 2005.
4. Grasty, R.L. 1987: The design, construction and application of airborne gamma-ray spectrometer calibration pads – Thailand. Geological Survey of Canada. Paper 87-10. 34 pp.
5. IAEA. 2003: Guidelines for radioelement mapping using gamma ray spectrometry data. IAEA-TECDOC-1363, Vienna, Austria. 173 pp.
6. Minty, B.R.S., Luyendyk, A.P.J. and Brodie, R.C. 1997: Calibration and data processing for gamma-ray spectrometry. AGSO – Journal of Australian Geology & Geophysics. 17(2). 51-62.
7. Naudy, H. and Dreyer, H. 1968: Non-linear filtering applied to aeromagnetic profiles. Geophysical Prospecting. 16(2). 171-178.

## 7. Appendix A1: Flow chart of magnetic processing

Meaning of parameters is described in the referenced literature.

Processing flow:

- Quality control.
- Visual inspection of airborne data and manual spike removal
- Conversion of ASCII data file from magbase station to Geosoft \*.bas files
- Import magbase data to Geosoft database
- Inspection of magbase data and removal of spikes
- Correction of data for diurnal variation
- Splitting flight data by lines
- Gridding
- Microlevelling

## 8. Appendix A2: Flow chart of EM processing

Meaning of parameters is described in the referenced literature.

Processing flow:

- Filtering of in-phase and quadrature channels with non-linear and low pass filters
- Automated leveling
- Quality control
- Visual inspection of data.
- Splitting flight data by lines
- Manual removal of remaining part of instrumental drift
- Calculation of an apparent resistivity for each frequency using both - in-phase and quadrature channels
- Gridding
- Micro levelling of apparent resistivity channels.
- Convolution filter.

## 9. Appendix A3: Flow chart of radiometry processing

Underlined processing stages are not only applied to the K, U and Th window, but also to the total. Meaning of parameters is described in the referenced literature.

Processing flow:

- Quality control
- Airborne and cosmic correction (IAEA, 2003)  
Used parameters: (determined by high altitude calibration flights near Narvik airport in August, 2011)
  - Aircraft background counts:

|              |     |
|--------------|-----|
| K window     | 9   |
| U window     | 3   |
| Th window    | 0   |
| Uup window   | 0   |
| Total counts | 150 |
  - Cosmic background counts (normalized to unit counts in the cosmic window):

|              |        |
|--------------|--------|
| K window     | 0.0610 |
| U window     | 0.0454 |
| Uup window   | 0.0237 |
| Th window    | 0.0626 |
| Total counts | 1.0536 |
- Radon correction using upward detector method (IAEA, 2003)  
Used parameters (determined from survey data over water and land):

|              |              |
|--------------|--------------|
| $a_u$ : 0.16 | $b_u$ : 1.69 |
| $a_K$ : 4.49 | $b_K$ : 0.14 |

|                 |                 |
|-----------------|-----------------|
| $a_T$ : 1.24    | $b_T$ : 1.82    |
| $a_{Tc}$ : 45.8 | $b_{Tc}$ : 7.47 |
| $a_i$ : 15.5    | $b_i$ : 36.3    |
| $a_1$ : 0.100   | $a_2$ : -0.02   |

- Stripping correction (IAEA, 2003)

Used parameters (determined from measurements on calibrations pads at the NGU):

|       |        |
|-------|--------|
| a     | 0.0482 |
| alpha | 0.3087 |
| beta  | 0.4807 |
| gamma | 0.7953 |

- Height correction to a height of 60 m

Used parameters (determined by height calibration flight at near Narvik airport in August, 2011):

Attenuation factors in 1/m:

|               |        |
|---------------|--------|
| K:            | 0.0107 |
| U:            | 0.0067 |
| Th:           | 0.0062 |
| Total counts: | 0.0076 |

- Converting counts at 60 m heights to element concentration on the ground

Used parameters (determined from NGU calibration pads):

Counts per elements concentrations:

|     |                 |
|-----|-----------------|
| K:  | 69.1 counts/%   |
| U:  | 7.71 counts/ppm |
| Th: | 4.38 counts/ppm |

- Microlevelling using Geosoft menu and smoothening by a convolution filtering

Used parameters for microlevelling:

|                                   |       |
|-----------------------------------|-------|
| De-corrugation cutoff wavelength: | 800 m |
| Cell size for gridding:           | 200 m |
| Naudy (1968) Filter length:       | 800 m |

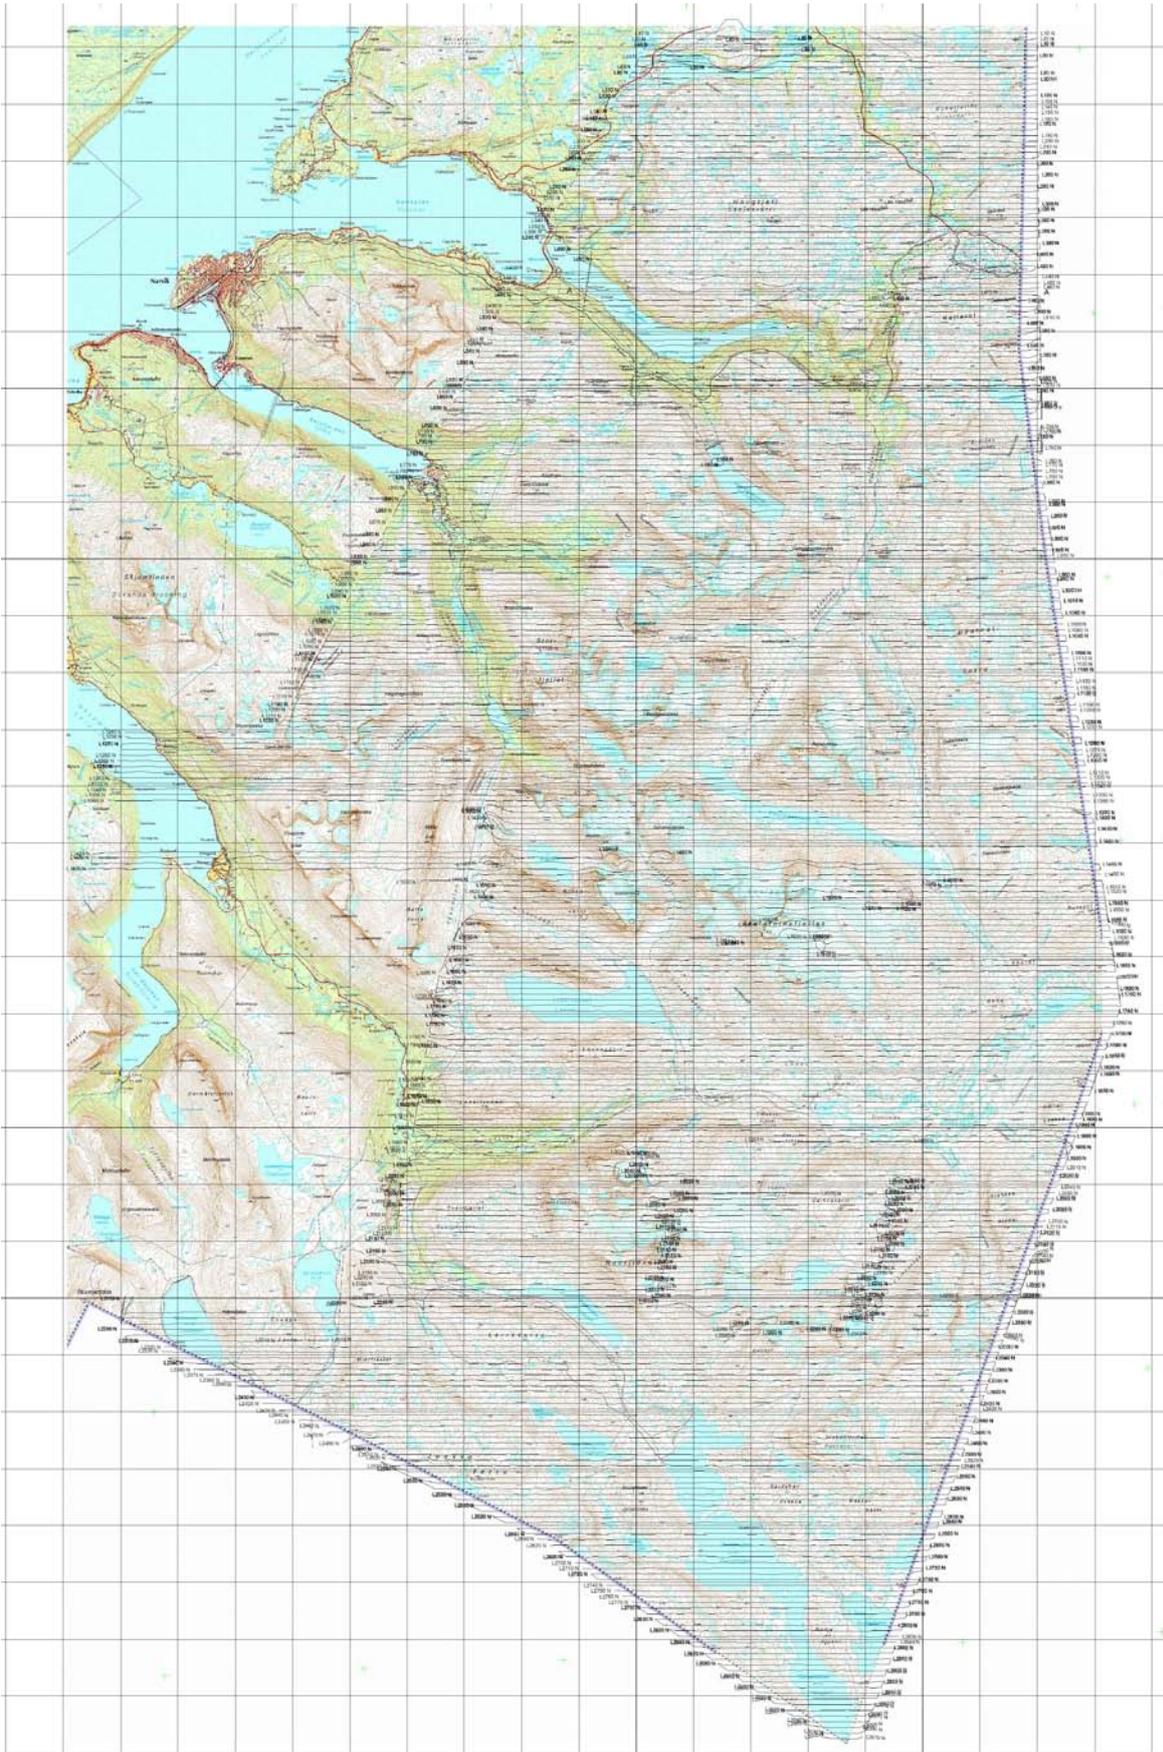


Figure 3. Rombaken survey. Flight path

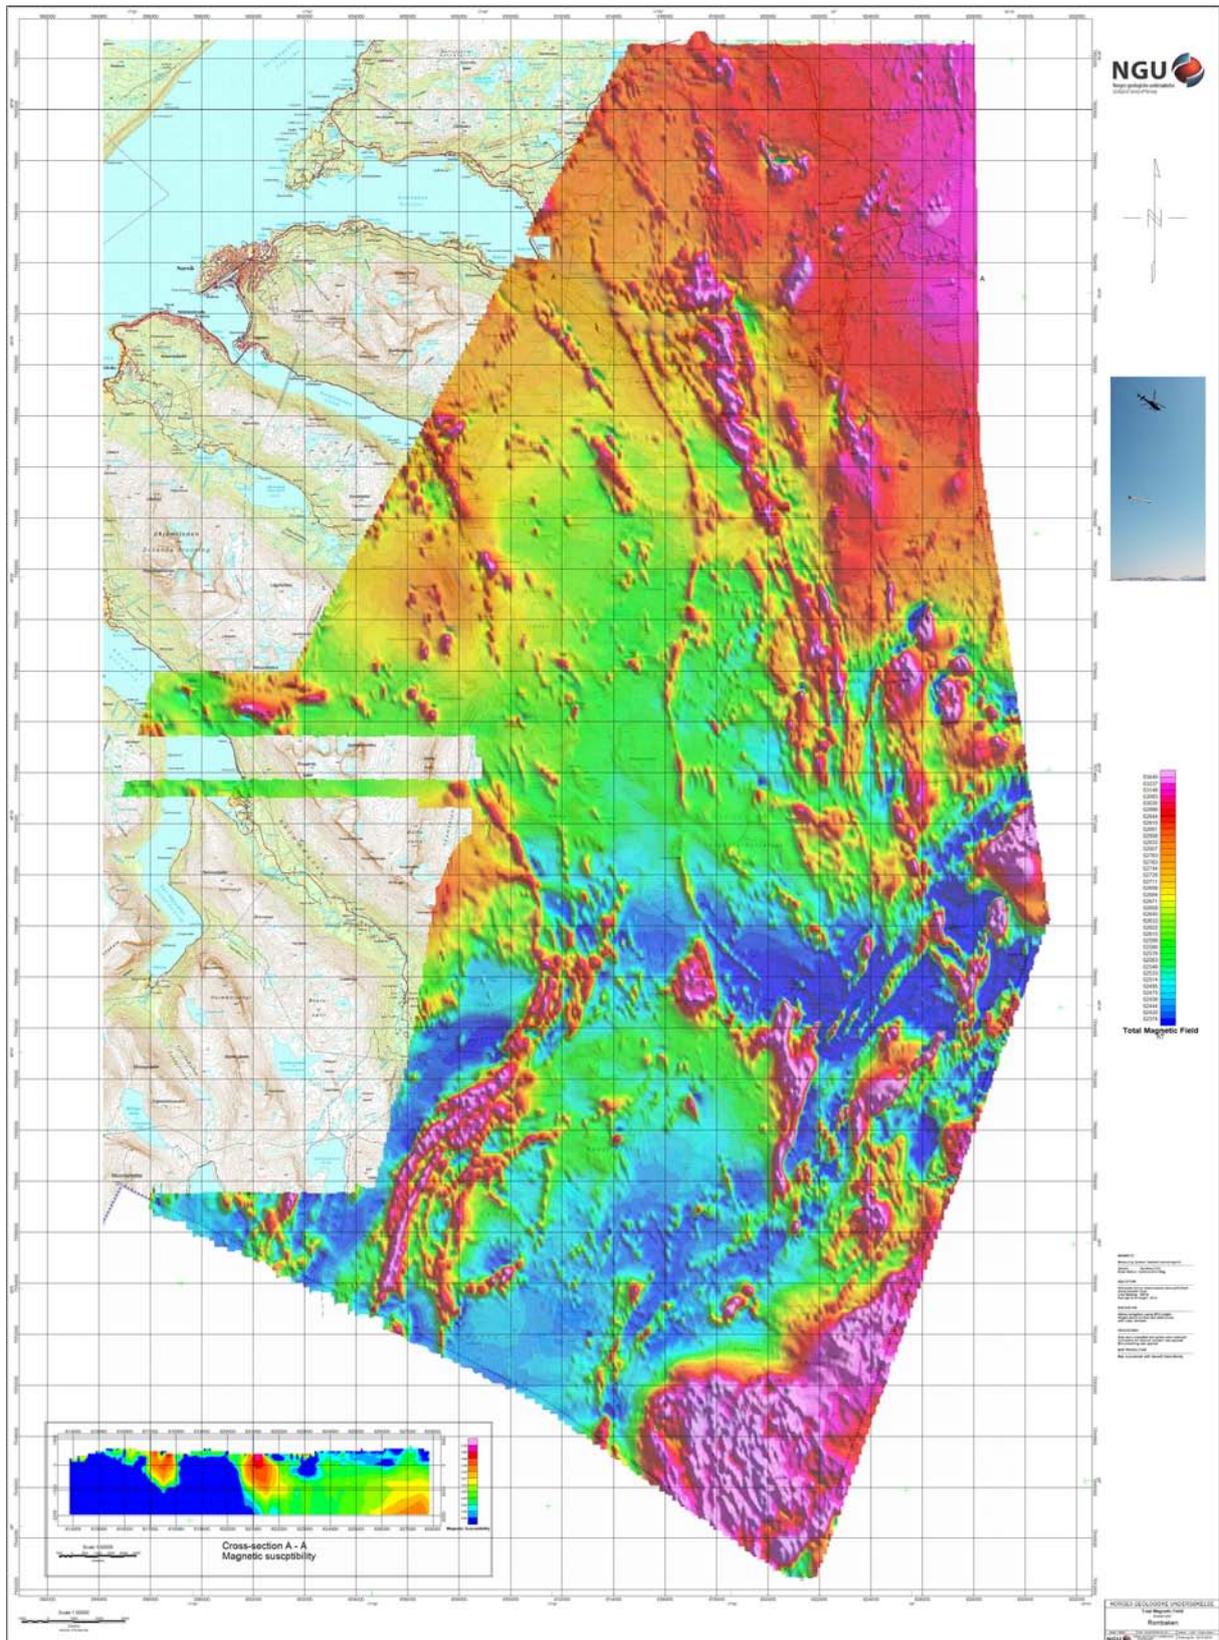


Figure 4. Total magnetic field

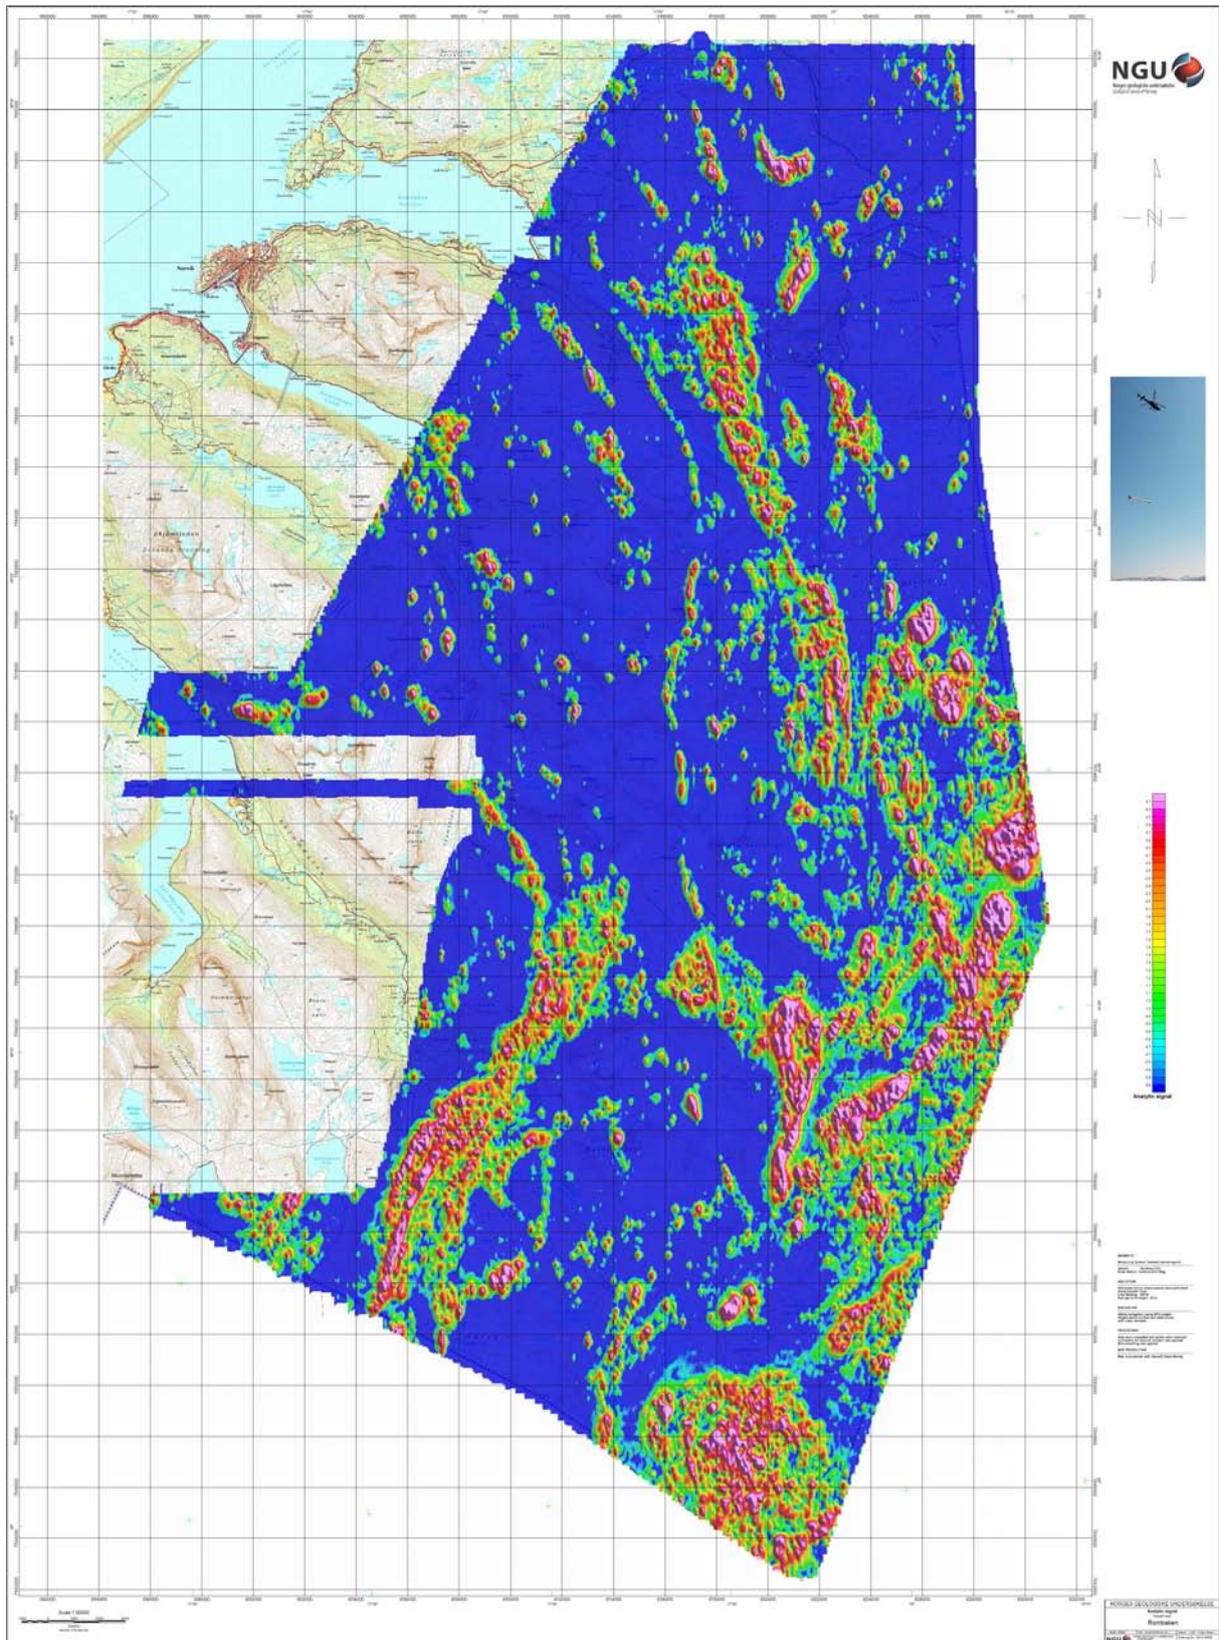


Figure 5. Magnetic Analytic Signal

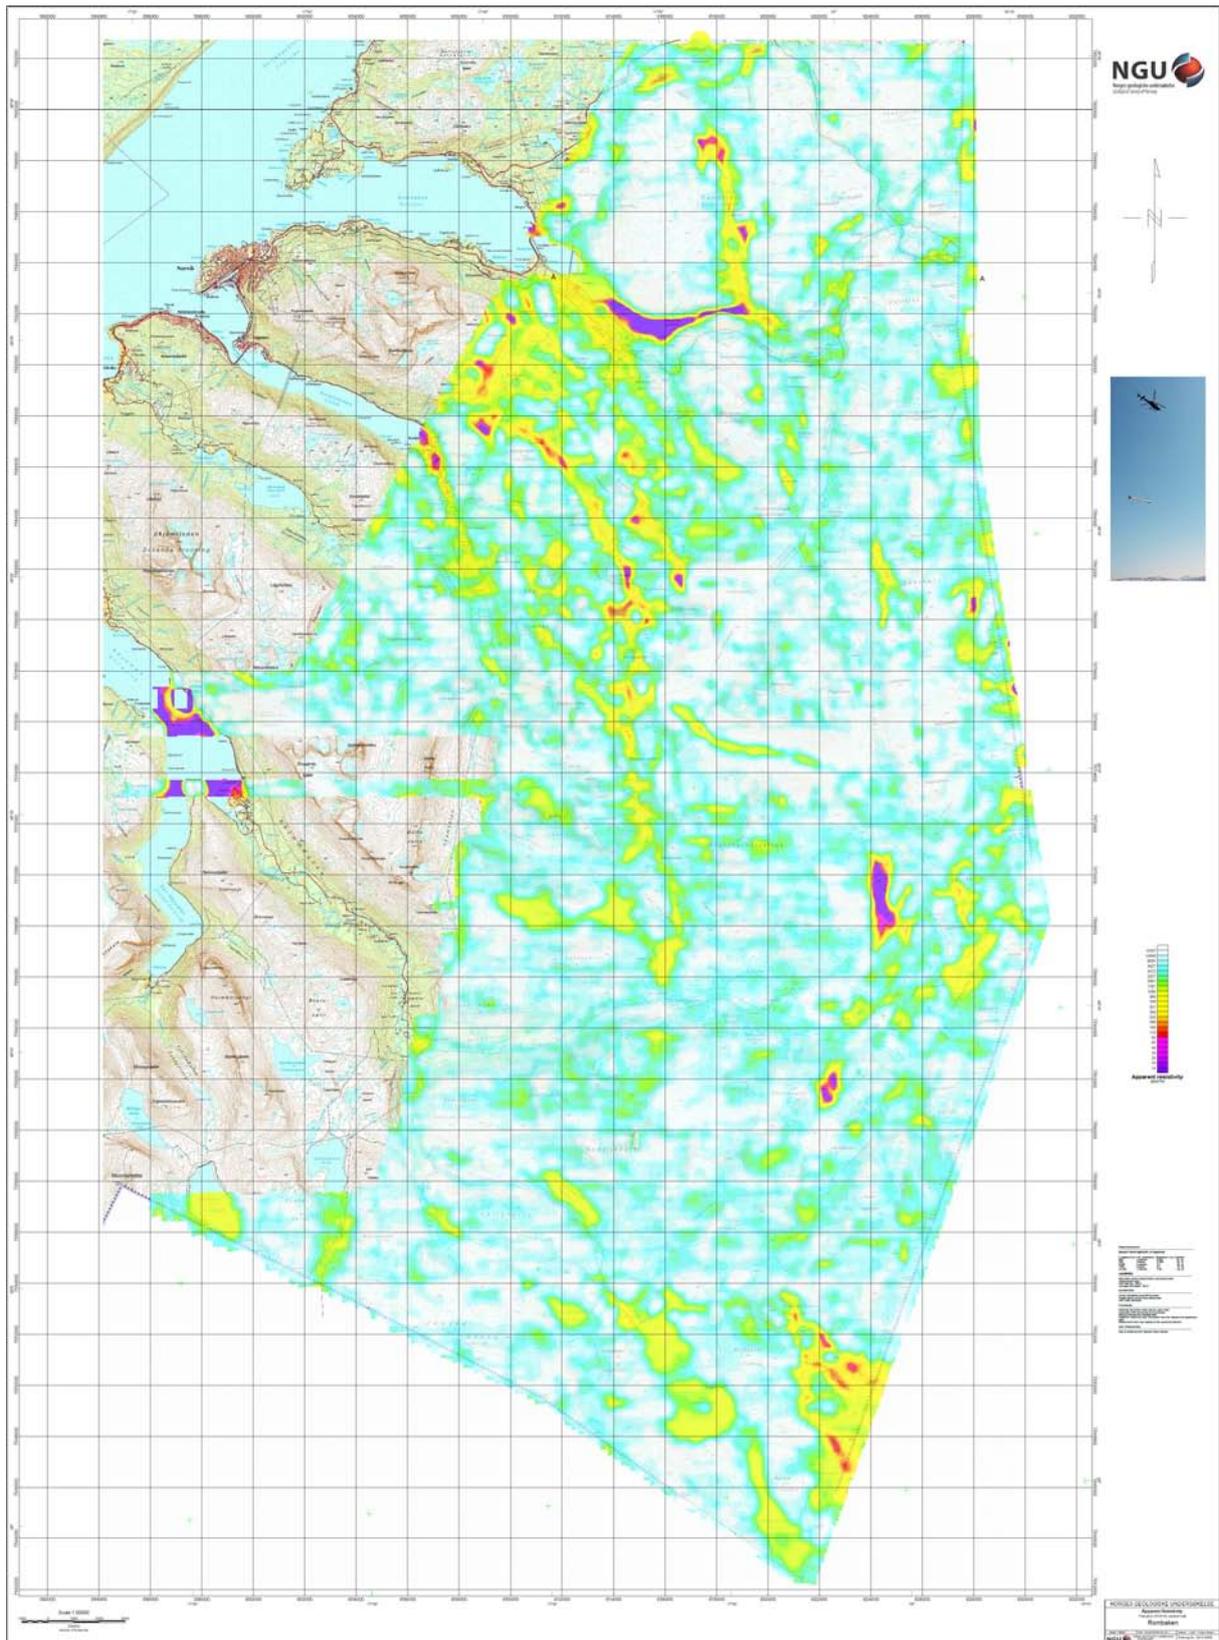


Figure 6. Apparent resistivity. Frequency 34000 Hz, Coplanar coils

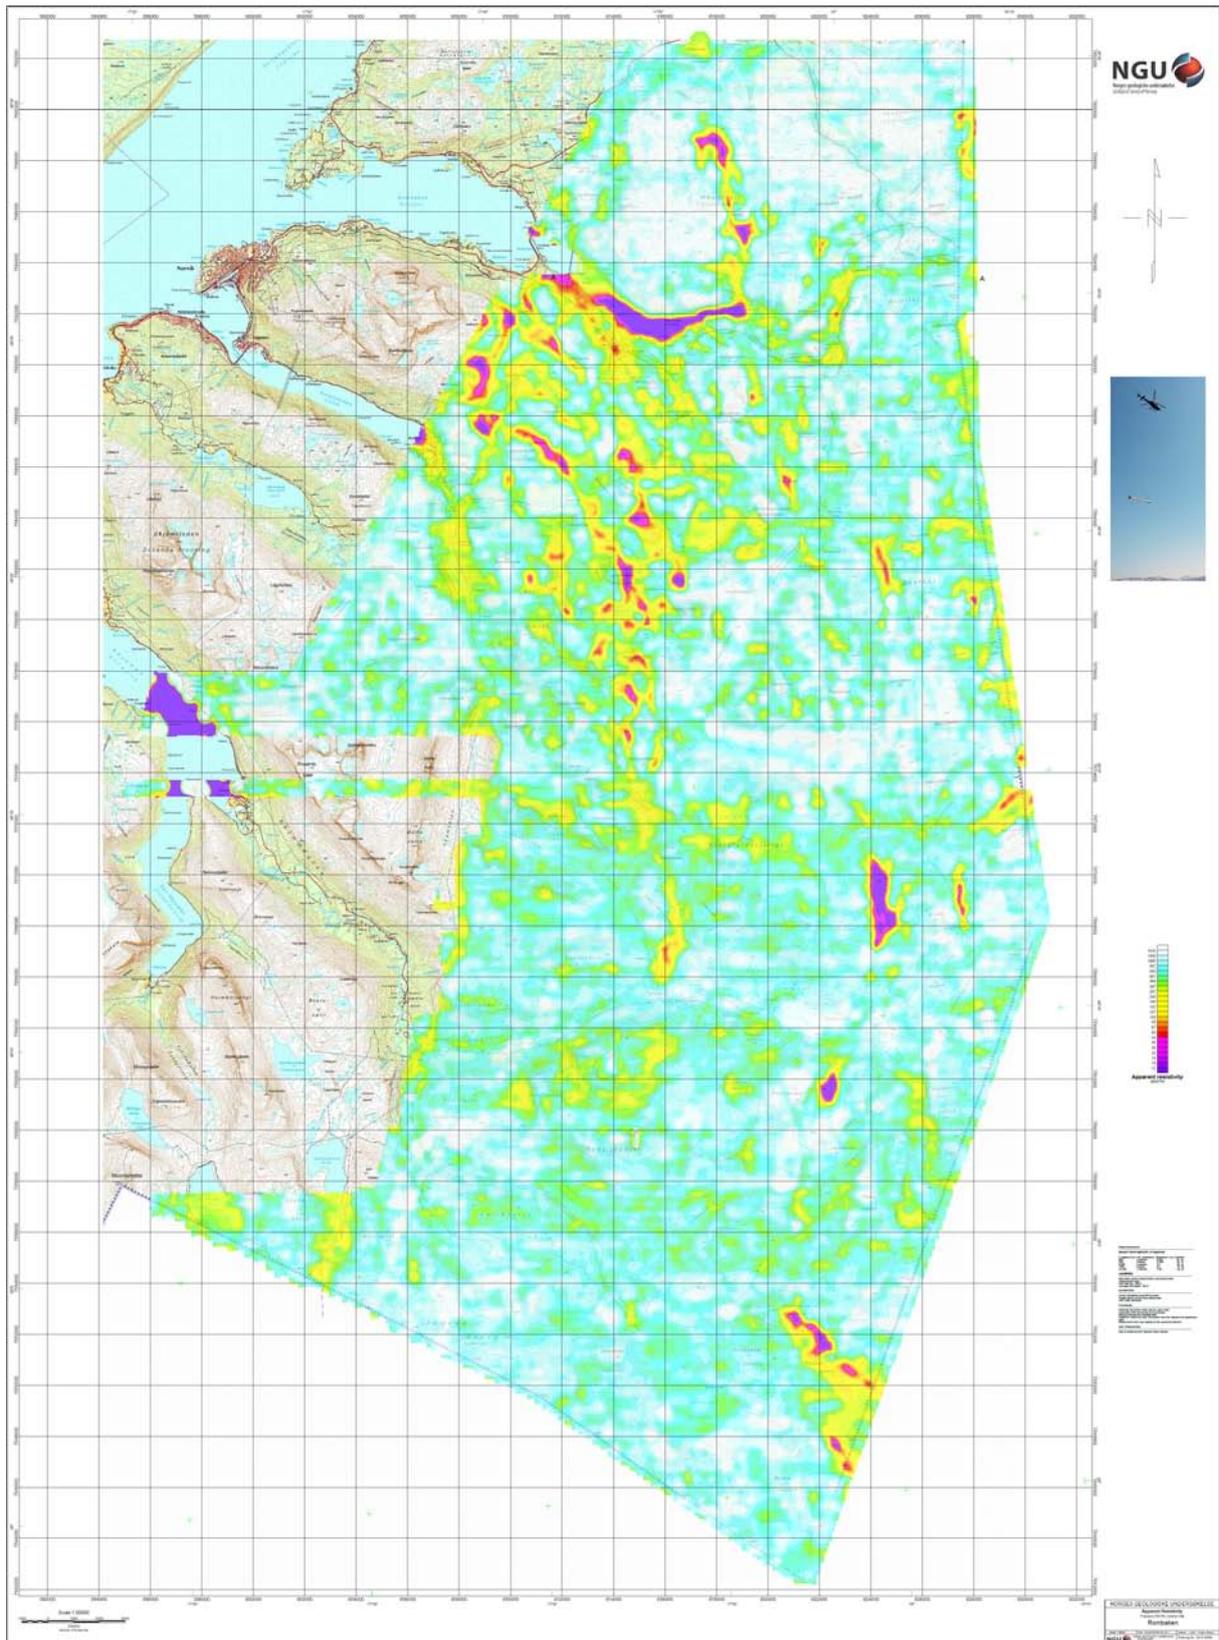


Figure 7. Apparent resistivity. Frequency 880 Hz, Coplanar coils

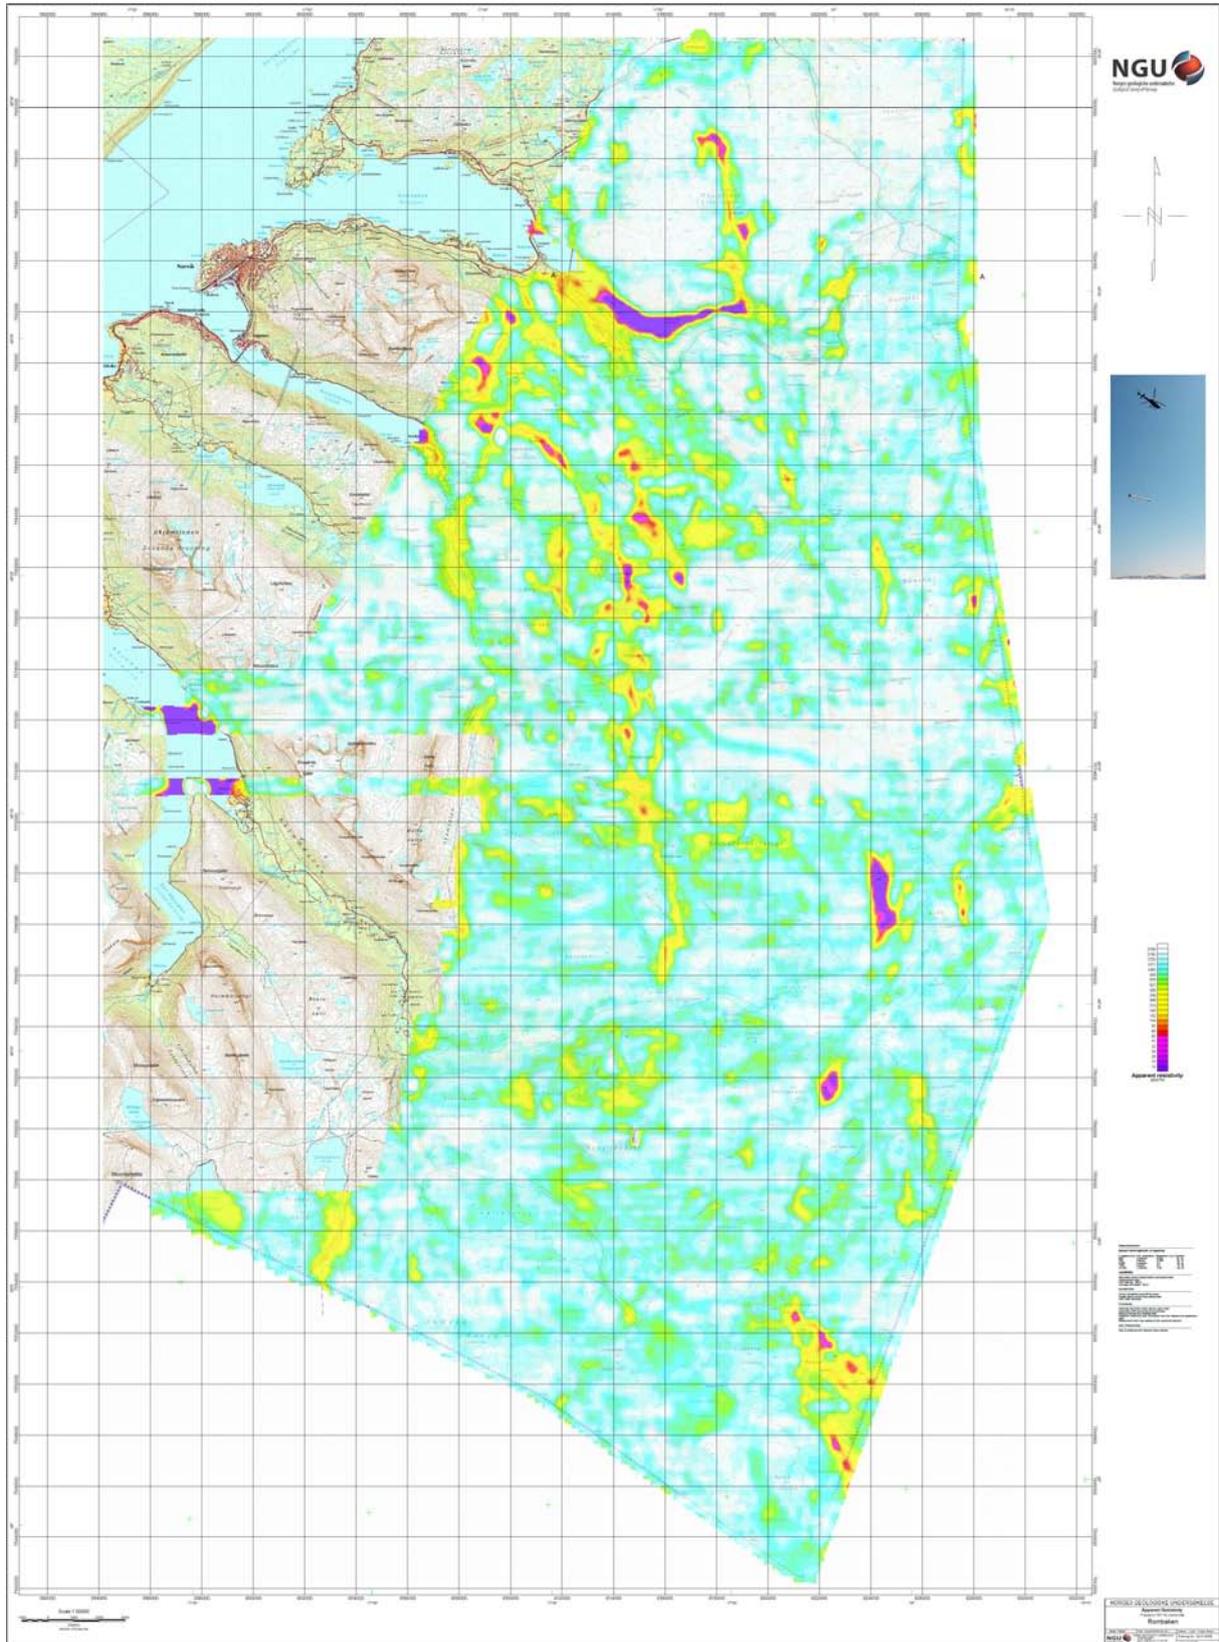


Figure 8. Apparent resistivity. Frequency 7000 Hz, Coaxial coils

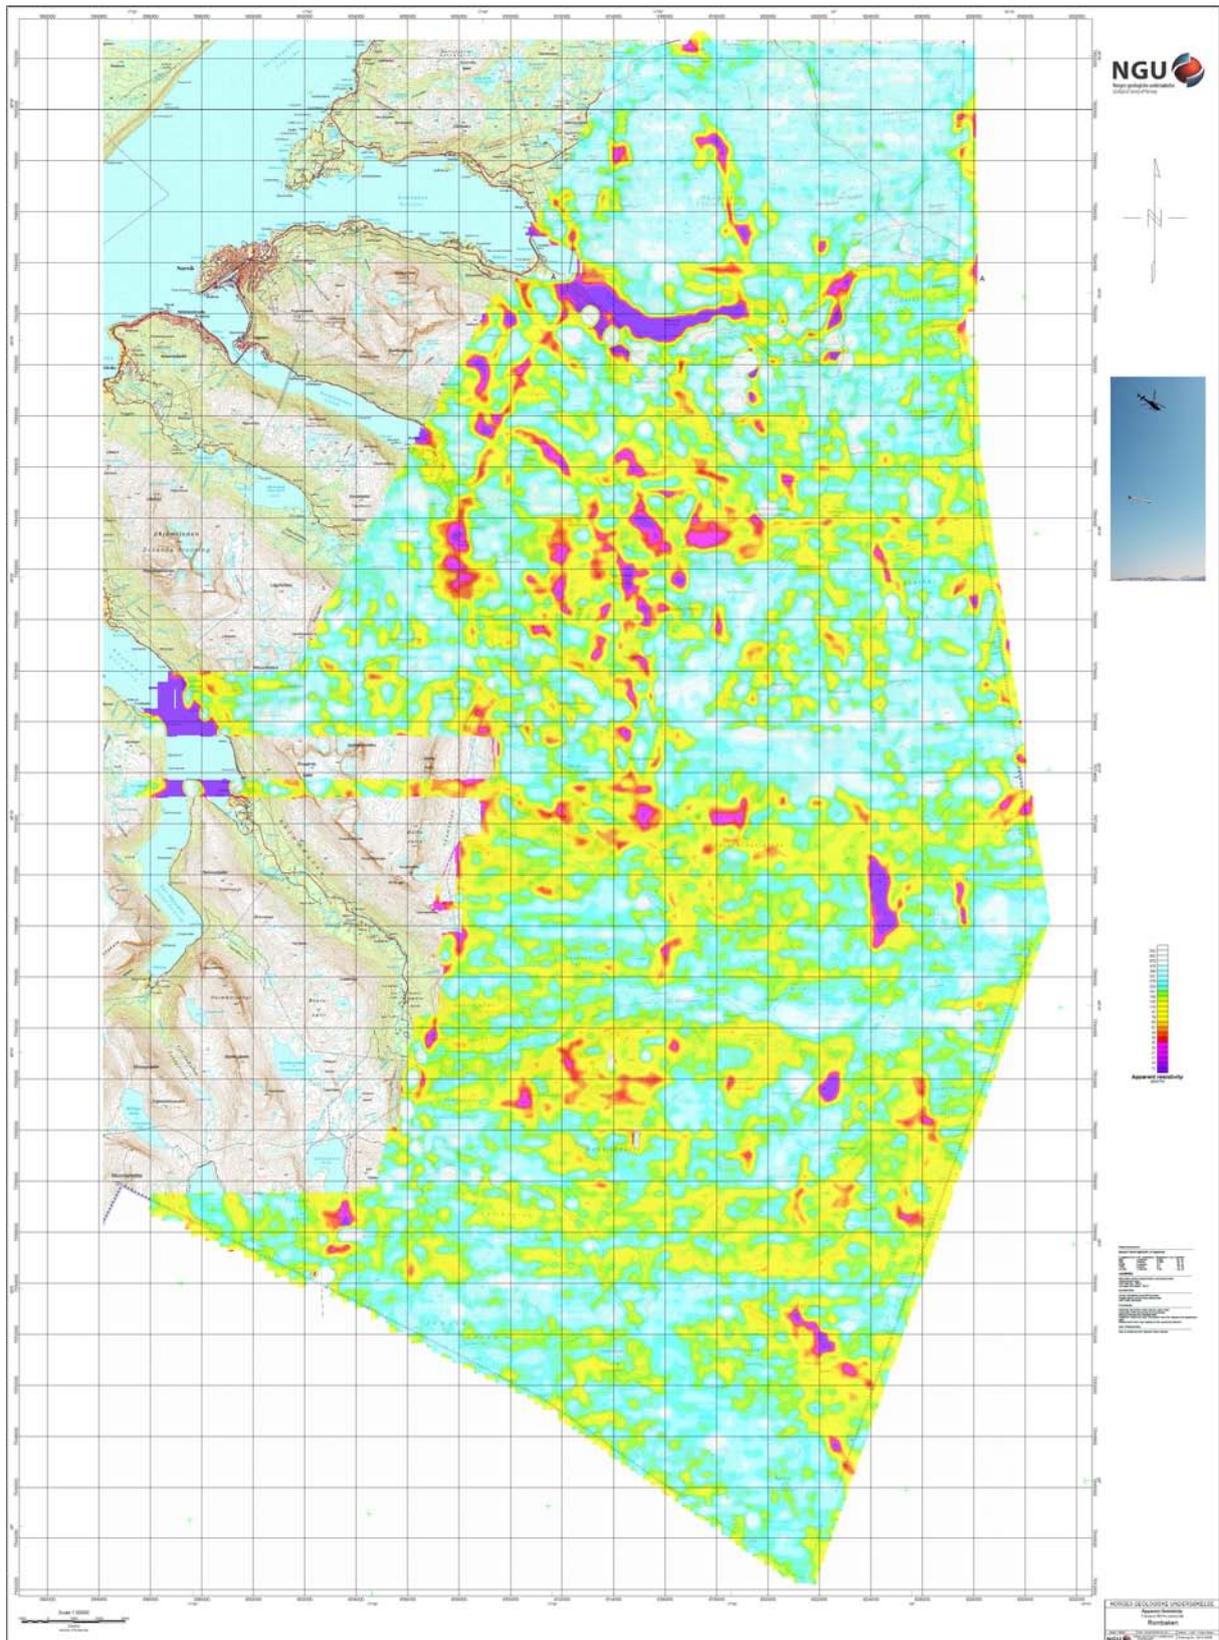


Figure 9. Apparent resistivity. Frequency 980 Hz, Coaxial coils


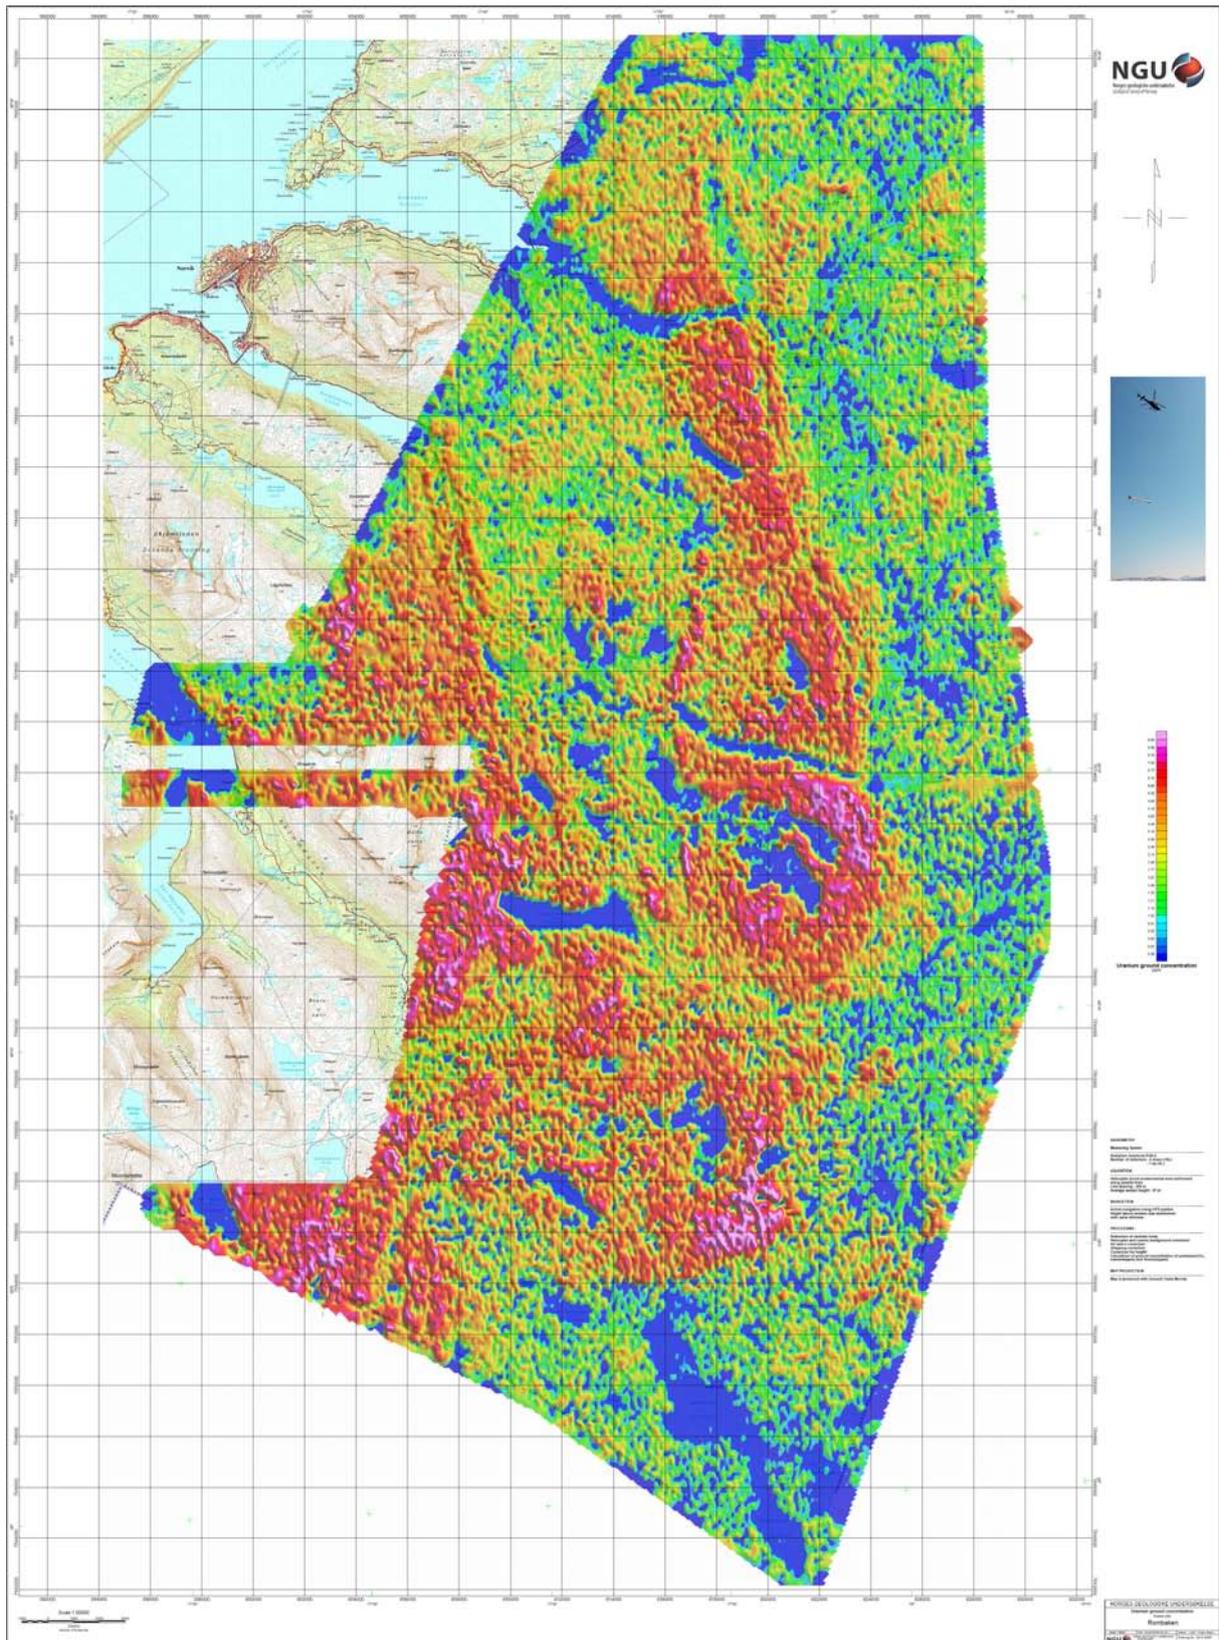


Figure 10. Uranium ground concentration







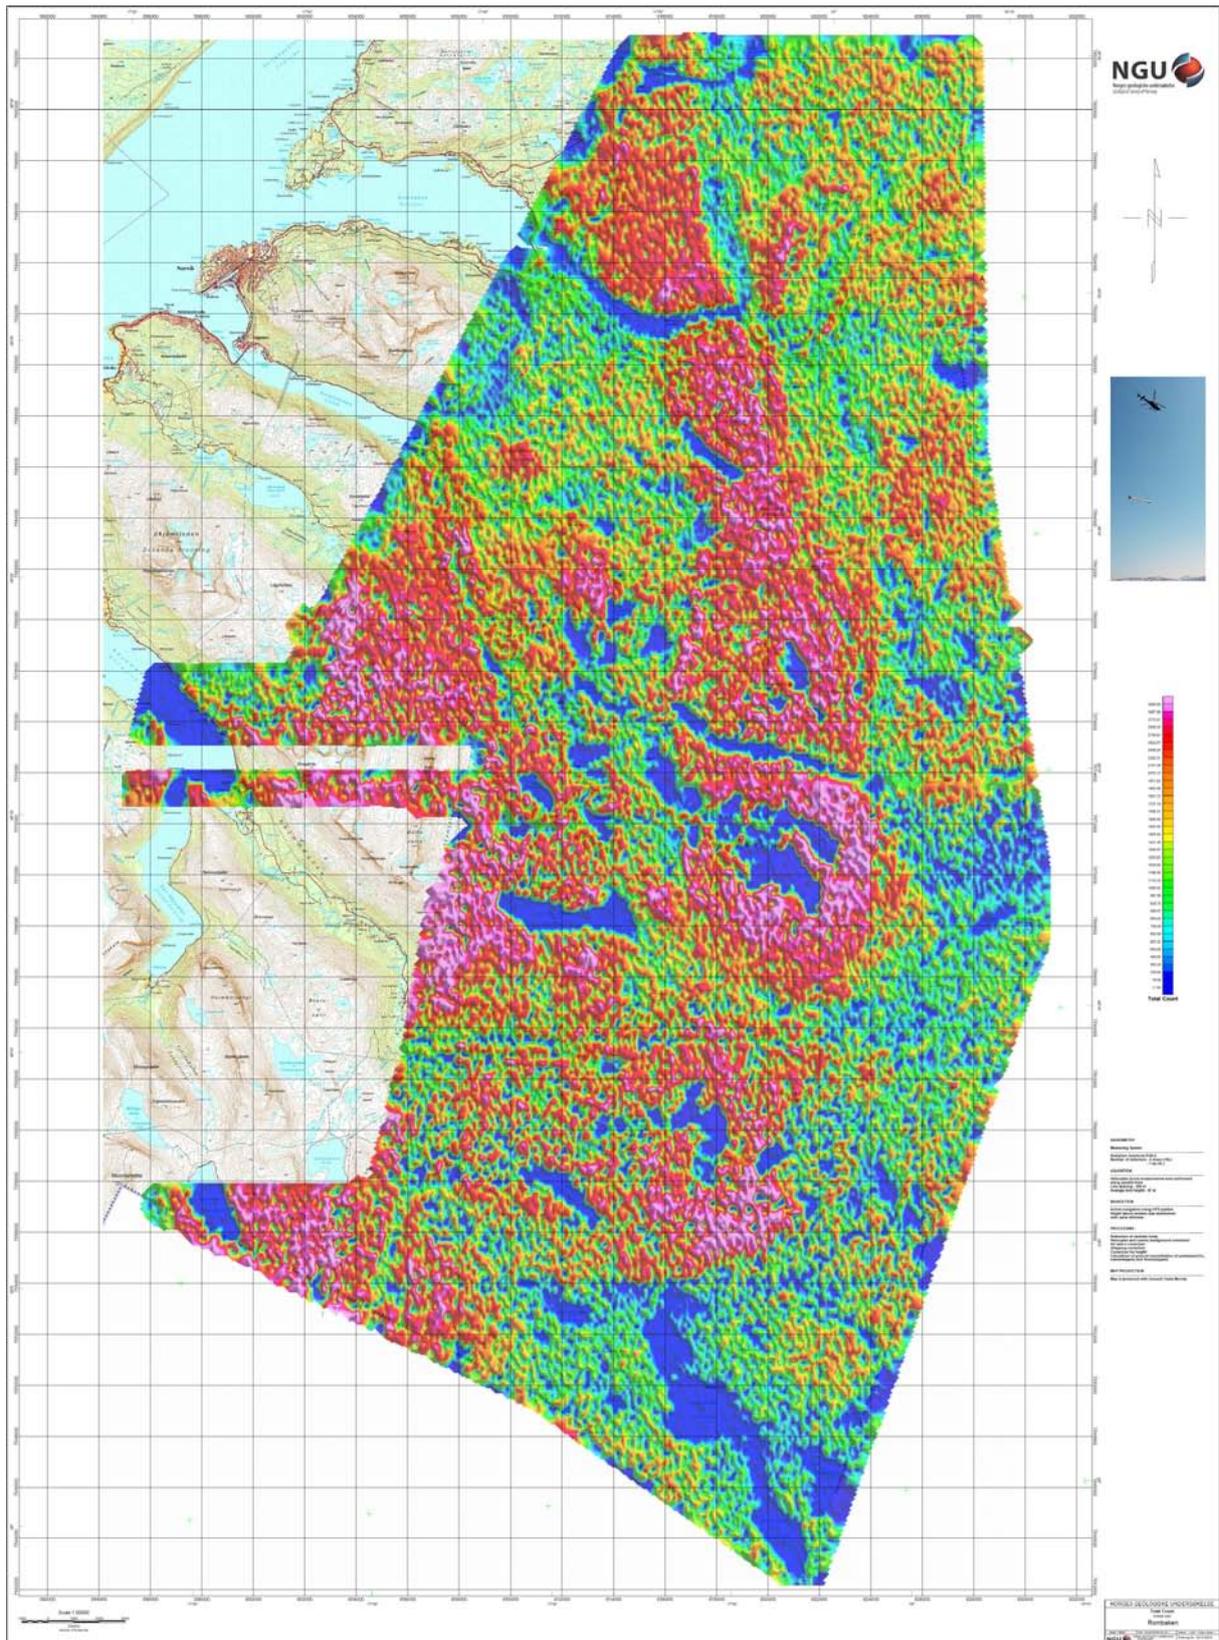

Norges geologiske undersøkelse  
Postboks 6315, Sluppen  
7491 Trondheim, Norge

Besøksadresse  
Leiv Eirikssons vei 39, 7040 Trondheim

Telefon 73 90 40 00  
Telefax 73 92 16 20  
E-post [ngu@ngu.no](mailto:ngu@ngu.no)  
Nettside [www.ngu.no](http://www.ngu.no)

*Geological Survey of Norway  
PO Box 6315, Sluppen  
7491 Trondheim, Norway*

*Visitor address  
Leiv Eirikssons vei 39, 7040 Trondheim*

*Tel (+ 47) 73 90 40 00  
Fax (+ 47) 73 92 16 20  
E-mail [ngu@ngu.no](mailto:ngu@ngu.no)  
Web [www.ngu.no/en-gb/](http://www.ngu.no/en-gb/)*